

ZW Down Light DESIGNER PLUS



PROJECT

450 8th St MONTARA

CATALOG #

TYPE

LANDSCAPE

NOTES



The ZW is a compact, fixed position, direct or indirect down light for grazing walls and other accent illumination needs.

UD Powder-coat and CU finishes



UD SS finish only

Quick Facts

- Offers down only or up-and-down configurations for various styles and effects
- Minimal visible hardware for a clean and elegant design, day or night
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color temperature, wildlife-friendly, and dynamic RGBW color-changing options
- Driver on Board Technology layout for compact design and fewer components
- Surface-mounted with stainless steel hardware
- Meets ADA requirements for sconce depth from wall
- Factory-sealed construction

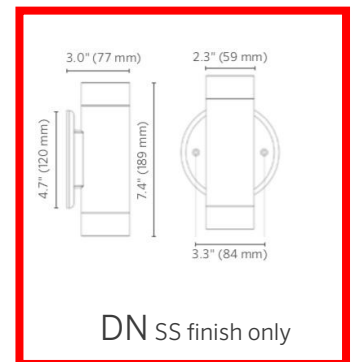

DN Powder-coat and CU finishes



Output	1LED (DN)	1LED (UD)	3LED (DN)	3LED (UD)	ZDC (DN)	ZDC (UD)
Total Lumens (lm)	55-65	110-130	180-210	360-425	-	-
Power Consumption (VA)	2.2	4.4	4.5	9.0	7.2	14.4
Efficacy (lm/W)	28	28	42	42	-	-
Correlated Color Temperature (CCT)	2700K	2700K	2700K	2700K	RGBW	RGBW
Color Rendering Index (CRI, Ra)	80+	80+	80+	80+	-	-
Beam Angle	60°	60°	60°	60°	50°	50°
Maximum Candela (cd)	130	130	360	360	-	-
Input Voltage (V)	10-15	10-15	10-15	10-15	11-15	11-15
Minimum Rated Life (L70 B10)	72,000 Hrs.	72,000 Hrs.	72,000 Hrs.	72,000 Hrs.	55,000 Hrs.	55,000 Hrs.

ZW Down Light SPECIFICATIONS

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Materials

Die-cast aluminum, 316 marine-grade stainless steel or copper body with stainless steel hardware and mounting bracket.

LED

Integrated module with Cree LEDs. Gold-plated connectors and conformal coating for maximum reliability and corrosion resistance. Proprietary onboard intelligent driver uses firmware-controlled temperature regulation, maximizing LED life. Field upgradeable and replaceable, the LEDs are rated to 55,000 hrs. Maximum drive current: 1 A.

Optics

Polycarbonate 2,700K color temperature adjustment lens included with fixture. Beam angle is calculated using LM-79 method for SSL fixtures.

Finish

Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards. Also available in natural copper (CU) and natural stainless steel (SS).

Hardware

Includes stainless steel mounting brackets for quick assembly.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length

Sockets

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Housing

Die-cast A380 aluminum, 316 marine-grade stainless steel or copper body with capacity for 1LED, 3LED, or ZDC integrated LEDs.

Weight

1.2 to 2.1 lbs. (0.5 to 1.0 kg)

Lens

Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress.

Ambient Operating Temperature

-4°F to 104°F (-20°C to 40°C) [-40°F to 122°F (-40°C to 50°C) for SS finish

Installation Requirements

Designed for installation to a vertical surface.

Control

ZD or ZDC utilizes Luxor technology to zone fixtures in up to 250 groups, dim each group in 1% increments between 0 and 100%, or change to one of 30,000 colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard fixture is zoneable with Luxor.

Warranty

Listings



Fixture Control		Power	Color Temp	Direction	Finish	
ZW	ZD Zone/Dim with Luxor	1 LED 2.0W/2.4VA	[Default] Warm (2700K)	DN Down	BZ Bronze Metallic	
	ZDC Zone/Dim/Color with Luxor	3 LED 4.5 VA	S Soft (3000K)	UD Up and Down (doubles the wattage/VA)	FB Black	
		[default ZDC option] 6.0W/7.2VA	C Cool (4000K)		DG Desert Granite	
			[Default] RGBW, ZDC Option Required		WI Weathered	
					SB Sedona Brown	
					FW Flat White	
					SV Silver	
					CU Copper	
					SS Stainless Steel	

-

-

-

-

-

EXAMPLE FIXTURE CONFIGURATION: ZW-ZD-3LED-UD-BZ

ZW 1LED DN - Illuminance at a Distance

Distance	Center Beam fc	Beam Width
Feet (Meters)	Foot-Candles (Lux)	Vertical : 30.3 °
2.0' (0.6 m)	30.2 fc (325 lx)	1.1' (0.3 m)
4.0' (1.2 m)	7.5 fc (81 lx)	2.2' (0.7 m)
6.0' (1.8 m)	3.4 fc (37 lx)	3.3' (1.0 m)
8.0' (2.4 m)	1.9 fc (21 lx)	4.3' (1.3 m)
10.0' (3.1 m)	1.2 fc (13 lx)	5.4' (1.7 m)
12.0' (3.7 m)	0.8 fc (9 lx)	6.5' (2.0 m)

ZW 1LED DN SS - Illuminance at a Distance

Distance	Center Beam fc	Beam Width
Feet (Meters)	Foot-Candles (Lux)	Vertical : 30.7 °
2.0' (0.6 m)	32.9 fc (354 lx)	1.1' (0.3 m)
4.0' (1.2 m)	8.2 fc (88 lx)	2.2' (0.7 m)
6.0' (1.8 m)	3.7 fc (40 lx)	3.3' (1.0 m)
8.0' (2.4 m)	2.1 fc (23 lx)	4.4' (1.3 m)
10.0' (3.1 m)	1.3 fc (14 lx)	5.5' (1.7 m)
12.0' (3.7 m)	0.9 fc (10 lx)	6.6' (2.0 m)

ZW 3LED DN - Illuminance at a Distance

Distance	Center Beam fc	Beam Width
Feet (Meters)	Foot-Candles (Lux)	Vertical : 31 °
2.0' (0.6 m)	97.0 fc (1044 lx)	1.1' (0.3 m)
4.0' (1.2 m)	24.2 fc (258 lx)	2.2' (0.7 m)
6.0' (1.8 m)	10.8 fc (118 lx)	3.3' (1.0 m)
8.0' (2.4 m)	6.1 fc (65 lx)	4.4' (1.3 m)
10.0' (3.1 m)	3.9 fc (43 lx)	5.6' (1.7 m)
12.0' (3.7 m)	2.7 fc (32 lx)	6.7' (2.0 m)

ZW 3LED DN SS - Illuminance at a Distance

Distance	Center Beam fc	Beam Width
Feet (Meters)	Foot-Candles (Lux)	Vertical : 36.2 °
2.0' (0.6 m)	90.2 fc (971 lx)	1.3' (0.4 m)
4.0' (1.2 m)	22.6 fc (243 lx)	2.6' (0.8 m)
6.0' (1.8 m)	10.0 fc (108 lx)	3.9' (1.2 m)
8.0' (2.4 m)	5.6 fc (60 lx)	5.2' (1.6 m)
10.0' (3.1 m)	3.6 fc (39 lx)	6.5' (2.0 m)
12.0' (3.7 m)	2.5 fc (27 lx)	7.8' (2.4 m)

MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.	Mounts	Catalog No.
	WP-ZW-2L-DN-XX 		WP-ZW-2L-UD-XX 
ZW DOWN wall sconce 4" round mounting plate	WP-ZW-4R-DN-XX* 	ZW UP/DOWN wall sconce 4" round mounting plate	WP-ZW-4R-UD-XX* 
ZW wall sconce corner mounting bracket	ZW-CB-OC-XX* 		

GLARE CONTROL: Specify Separately

Glare Control	Catalog No.		Glare Control	Catalog No.
Hex Baffle for MR-16 LED Lamps	250015260000			

POWER OPTIONS: Specify Separately

Power	Catalog No.		Power	Catalog No.	
Low-Voltage Dimmer	DIM-LV		Luxor Low-Voltage CUBE	LCM-LV	
Mini Plug-In Transformer, 30 W	MT-30W		Plug-In Transformer, 6 W	MT-6W	
Step-Down Transformer, Dimmable (120 V to 12 V)	ST-120-DIM			SURGE-MOD	



landscape • entertainment • architectural • hospitality • illumination

PL-23 SERIES PATH LIGHT



25301 COMMERCENTRE DRIVE • LAKE FOREST, CA 92630 • 949.830.1350 • 888.882.1350 • FAX 949.830.3390



PATH LIGHTS PL-23 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded 2.25" square aluminum or brass.

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)

LAMP OPTIONS: 12v 3w 50,000 hours average rating OMNI-3 LED (-LED3)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200° C silicone lead wires.

No socket for LED Panel models

LED PANEL OPTION: 12v, 4w, 300 lumen integrated LED flat panel, warm white 3000K (-LEDP); optional cool white 5200K 320 lumen available (modify part number to -LEDP52)

LED LIFETIME RATING: 50,000 Hours

LED INTERNAL DRIVER*: 4w 350mA output, 12v AC input. Voltage range of 9 to 18 volts with optimum operating range of 10 to 15 volts for consistent performance and brightness. For use with magnetic transformers only.

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

120v standard wiring

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only

MOUNTING: DM models supplied with FA-03-LG black 9" ABS stake, tapped 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished brass. Optional finishes available


***NOTE:** Optional 120v to 277v LED drivers available

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-23DM-18BLT	18" Square Aluminum Bollard	18w S8 #1141	3.0 lbs.
PL-23DM-18BRS	18" Square Brass Bollard	18w S8 #1141	6.0 lbs.
PL-23DM-24BLT	24" Square Aluminum Bollard	18w S8 #1141	3.0 lbs.
PL-23DM-24BRS	24" Square Brass Bollard	18w S8 #1141	6.0 lbs.
PL-23DM-18LEDPBLT	18" Square Aluminum Bollard	4w LED Panel	3.0 lbs.
PL-23DM-18LEDPBRS	18" Square Brass Bollard	4w LED Panel	6.0 lbs.
PL-23DM-24LEDPBLT	24" Square Aluminum Bollard	4w LED Panel	3.0 lbs.
PL-23DM-24LEDPBRS	24" Square Brass Bollard	4w LED Panel	6.0 lbs.

Angle Cut - No stake required. 10" of total length designed to go in ground for 18" & 24" above ground height

PL-23-28BLT	28" Square Aluminum Bollard	18w S8 #1141	3.0 lbs.
PL-23-28BRS	28" Square Brass Bollard	18w S8 #1141	6.0 lbs.
PL-23-34BLT	34" Square Aluminum Bollard	18w S8 #1141	3.0 lbs.
PL-23-34BRS	34" Square Brass Bollard	18w S8 #1141	6.0 lbs.
PL-23-28LEDPBLT	28" Square Aluminum Bollard	4w LED Panel	3.0 lbs.
PL-23-28LEDPBRS	28" Square Brass Bollard	4w LED Panel	6.0 lbs.
PL-23-34LEDPBLT	34" Square Aluminum Bollard	4w LED Panel	3.0 lbs.
PL-23-34LEDPBRS	34" Square Brass Bollard	4w LED Panel	6.0 lbs.

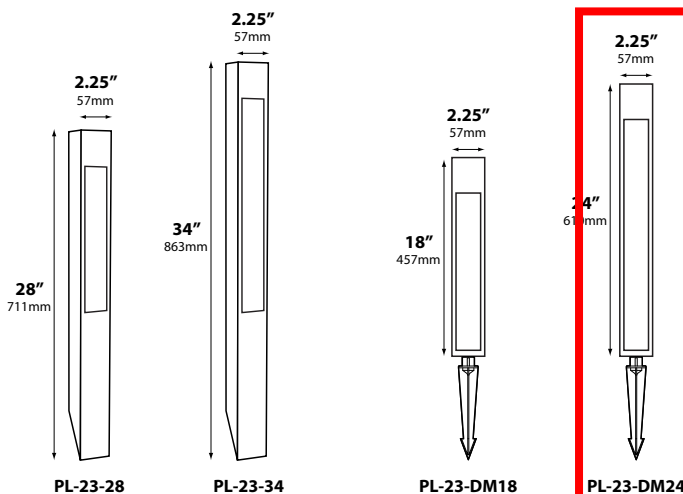

Taller fixtures available as custom item. Consult factory for details.

Maximum Height of angle cut model is 34"

Maximum height of -DC version is 32"



PL-23DM-18BAR



PL-23DM-24BAR

IP54



JOB INFORMATION

Type:	Date:
Job Name:	450 8th St MONTARA
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder		Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	DBZ	-BAR/CAR	-BAV/CAV	-BAT




PATH LIGHTS PL-23 SERIES





TYPE

MOUNTING ACCESSORIES

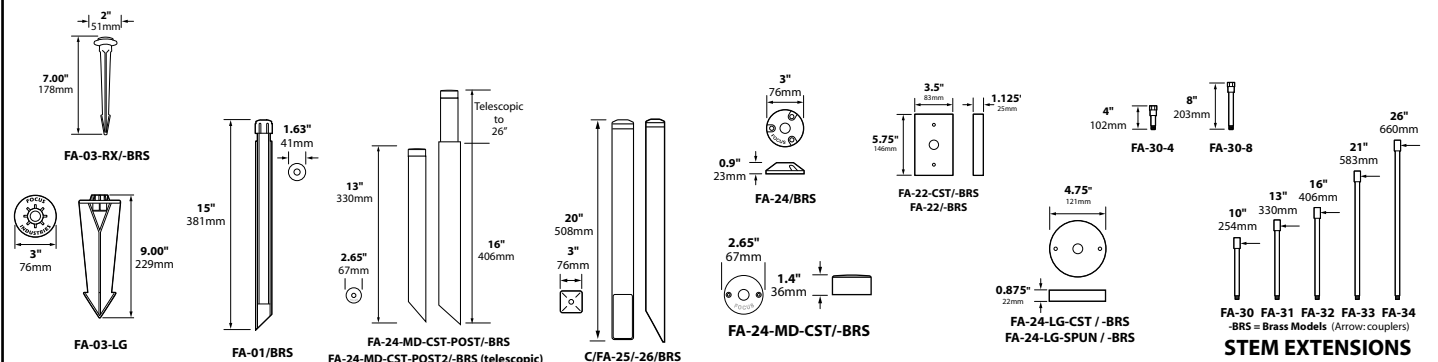

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

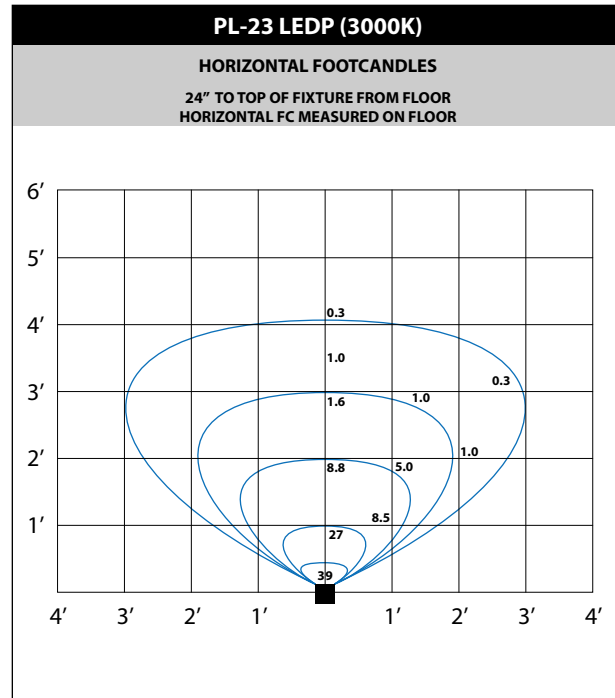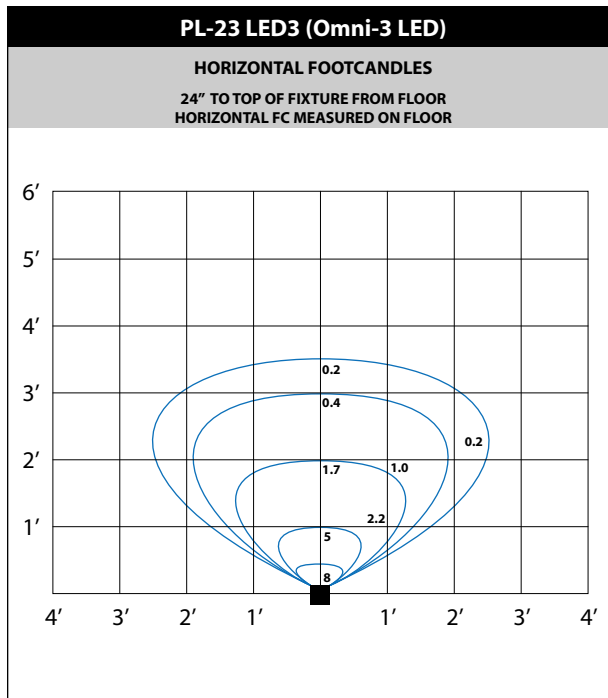

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT

AURORALIGHT

PROJECT: _____

SKU #: _____

TYPE: _____

GIZA

PTA255105

The Giza, named after the City of Pyramids, features a bold upright posture with craftsmanship worthy of its pedigree. Giza: bold styling, superior materials, mechanical innovation; pure engineering-bliss.

- Thermally Integrated® w/ Copper Core Technology®
- Cree LED™ XP-L® High Density
- Precision Machined Acrylic Optic
- Ideal for driveways, pathways and gardens

CONFIGURATOR:


	LED	FINISH
PTA255105		
() = Most common configuration	(2706) 2700K 6W (3006) 3000K 6W	(NAT) Natural Brass (BLP) Bronze Living Patina (BLPX) Extra Dark BLP (NI) Nickel PVD

AVAILABLE FINISHES:



FIXTURE DIMENSIONS	W5-1/2" x H21-5/8"
LIGHT SOURCE	Integrated LED
COLOR TEMPERATURES	2700K, 3000K
WATTAGES	6W
CRI (RA)	80 CRI
VOLTAGE	12V
DELIVERED LUMENS	224lm (2700K)
DIMMABLE	Yes, Dim to <10% via Transformer
DRIVER	Yes, 12V Integral Constant Current
TRANSFORMER	12V AC/DC (Supplied by others)
MOUNT	Yes, Included 1/2" NPS Adapter
GROUND STAKE	Yes, Included MGS001109
FINISH	Included Natural Brass
MATERIAL	Brass
WIRE LENGTH	24"
LOCATION	Exterior Wet
CERTIFICATIONS	UL, IP66, IP67, Dark Sky

*For complete warranty terms, please visit: www.auroralight.com/warranty/

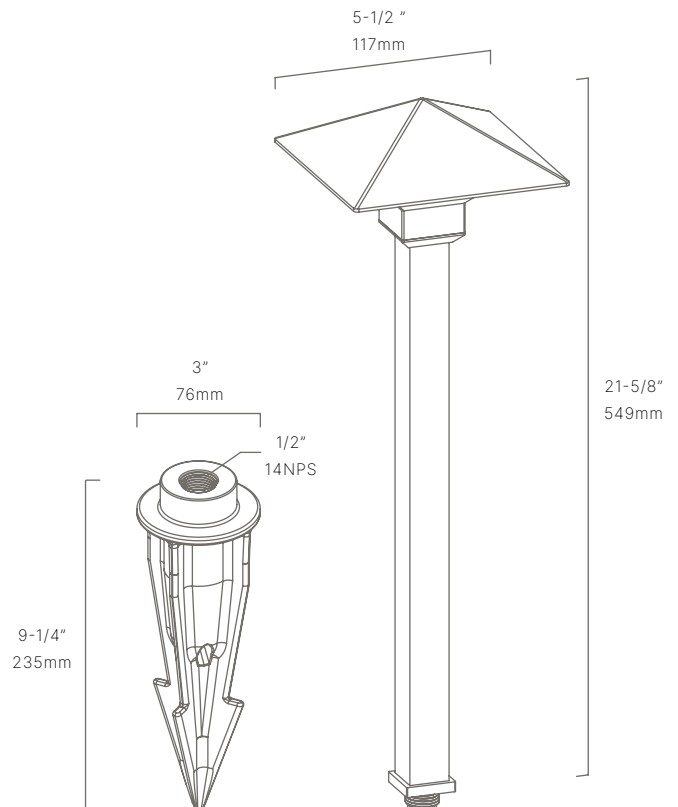

P. 760.931.2910

O. 2742 Loker Ave. W Carlsbad CA 92010

W. www.auroralight.com

MADE IN USA
WITH DOMESTIC & IMPORTED MATERIALS



PROJECT:

SKU #:

TYPE:

ADD-ONS

MOUNTS

MGS001510	Ground Stake w/ 2" Brass Cap
MGS001612	Ground Stake w/ 3" Brass Cap
MGS001712	Ground Stake w/ 3-1/4" Brass Cap
MGS005109	9" Deluxe Spike
MGS005212	12" Trident Spike
MJB002303	3" Junction Box w/ PVC Stake
MPM003104	Concrete Pedestal Mount
MSM189102	2" Surface Mount
MSM189203	3" Surface Mount

*For complete details, please visit auroralight.com/mounts/





RD



ST



SQ



WW

PROJECT

450 8th St MONTARA

CATALOG #

TYPE

LANDSCAPE


NOTES

PO Wall Light **DESIGNER PREMIUM**

1 LED recessed wall light available in four brass faceplate styles for any application.

Quick Facts

- Die-cast brass or aluminum
- Natural, powder-coated, or antique brass
- Cree® integrated LEDs
- Color temperature filters
- Compatible with Luxor® technology
- Phase and PWM dimmable
- Input voltage: 10-15V

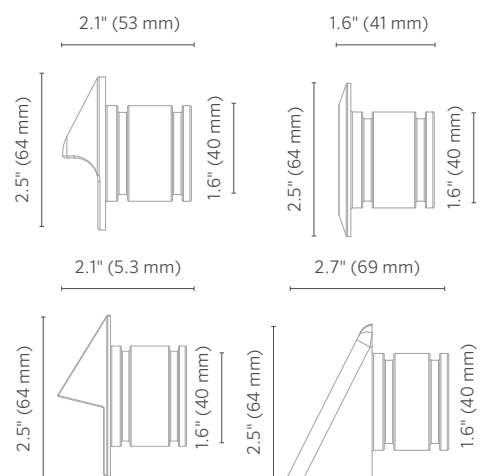

PO Wall Light SPECIFICATIONS

Output	1LED
Total Lumens†‡	4-39
Input Voltage	10 to 15V
Input Power (W)	2.0
VA	2.4
Efficacy (Lumens/Watt)	8
Color Rendering Index (CRI)	80+
Max Candela‡	24
Dimming	PWM, Phase**
RGBW Available	No
Luxor Compatibility	
Default	Zoning
ZD Option	Zoning/Dimming
ZDC Option	--
Minimum Rated Life (L90/B10)	55,000 Hrs

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).

‡ Measured using the Round (RD) faceplate. Multipliers for other faceplates include: 1.0 (Square), 2.0 (Spot), and 0.4 (Wall Wash).

** For optimal performance, use a trailing-edge, phase-cut dimmer.

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast C360 brass faceplate, A380 aluminum housing, ABS construction conduit sleeve.

Socket

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

Lamp

Integrated module with Cree LEDs. Gold-plated connectors and conformal coated for maximum reliability and corrosion resistance. Proprietary on-board intelligent driver uses firmware-controlled temperature regulation, maximizing LED life. Field upgradeable and replaceable, the LEDs are rated to 50,000 hrs. Maximum drive current: 1 A.

Optics

Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (pre-installed); 3,900K (no lens); 4,500K; and 5,200K. Color temperature lenses field serviceable. Beam angle is calculated using LM-79 method for SSL luminaires.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length.

Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Housing

Die-cast aluminum housing with capacity for 1LED integrated LEDs.

Faceplate

Die-cast brass faceplate.

Lens

Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress.

Finish

Options of natural brass finish, antique finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect, or TGIC powder-coat finish. Antique finishes sealed with a clear TGIC powder-coat layer.

Hardware

Includes ABS conduit sleeve with ½"-14 (13 mm) NPT female hole for strain relief. Strain relief specified separately. Outer diameter of ABS conduit sleeve: 1.9" (48 mm).

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Weight

2.3 lbs. (1.0 kg)

Control

ZD option utilizes Luxor technology to zone light fixtures in up to 250 groups, dim each group in 1% increments between 0% and 100%.

International Compliance

Compliant per IEC 60598-1 and IEC 60598-2-7 when used with International Wall Kit ("EKITWALL").

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

IES Classification

Type IV (RD & SQ), Type V (ST) Type II (WW).

Warranty

10-year limited warranty

Installation Requirements

RD & SQ – Designed for recessed installation in a vertical wall in the down lighting position only.

WW – Designed for recessed installation in a vertical wall in any orientation.

ST – Designed for recessed installation in a vertical or horizontal wall; ensure substantial drainage flow for up lighting (e.g., decking).

Listings



PO Wall Light ORDERING INFORMATION

Fixture	Luxor Option	Output	Faceplate	Finish
PO*	■ [default] Zone	■ 1LED 4-39 Lumens	■ RD Round	■ BS Natural Brass
	■ ZD Zone/Dim		■ SQ Square	■ BZ Bronze Metallic
			■ ST Spot	■ DG Desert Granite
			■ WW Wall Wash	■ WI Weathered Iron
				■ SB Sedona Brown
				■ FB Black
				■ WG White Gloss
				■ FW Flat White
				■ AL Almond
				■ SV Silver
				■ NP Nickel Plate
				■ AB Antique Bronze
				■ AT Antique Tumbled

EXAMPLE FIXTURE CONFIGURATION:

PO-ZD-1LED-RD-BZ

*Includes 1.5" (38 mm) Conduit Sleeve (25001859000)

PO

 - -

1LED

 - -

ACCESSORIES: Specify Separately

Accessories	Code	
■ PO MOUNTING BRACKET 1.3" H x 2.5" W (33 mm x 64 mm)	POBRKT	
■ STANDARD OPTICS KIT	1LEDOPTICKIT	
■ WALL LIGHT CONNECTION KIT	EKITWALL	

PO Wall Light PHOTOMETRICS

PO 1LED Illuminance at a Distance		RD/SQ	
Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 35°	Horizontal 60°
2.0' (0.6 m)	0.2 fc (2.2 lx)	1.3' (0.4 m)	2.3' (0.7 m)
4.0' (1.2 m)	0.1 fc (1.1 lx)	2.6' (0.8 m)	4.6' (1.4 m)
6.0' (1.8 m)	0.02 fc (0.2 lx)	4.0' (1.2 m)	6.9' (2.1 m)
8.0' (2.4 m)	0.01 fc (0.1 lx)	5.3' (1.6 m)	9.2' (2.8 m)
10.0' (3.1 m)	0.01 fc (0.1 lx)	6.6' (2.0 m)	11.5' (3.5 m)

PO 1LED Illuminance at a Distance		ST	
Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 80°	Horizontal 75°
2.0' (0.6 m)	6.1 fc (66 lx)	3.3' (1.0 m)	3.1' (1.0 m)
4.0' (1.2 m)	1.5 fc (16.4 lx)	6.6' (2.0 m)	6.3' (1.9 m)
6.0' (1.8 m)	0.7 fc (7.3 lx)	9.8' (3.0 m)	9.4' (2.9 m)
8.0' (2.4 m)	0.4 fc (4.1 lx)	13.1' (4.0 m)	12.6' (3.8 m)
10.0' (3.1 m)	0.24 fc (2.6 lx)	16.4' (5.0 m)	15.7' (4.8 m)

PO 1LED Illuminance at a Distance		WW	
Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 45°	Horizontal 60°
2.0' (0.6 m)	0.9 fc (9.5 lx)	1.6' (0.5 m)	2.2' (0.7 m)
4.0' (1.2 m)	0.2 fc (2.4 lx)	3.2' (1.0 m)	4.5' (1.4 m)
6.0' (1.8 m)	0.1 fc (1.1 lx)	4.9' (1.5 m)	6.7' (2.0 m)
8.0' (2.4 m)	0.1 fc (0.5 lx)	6.5' (2.0 m)	9.0' (2.7 m)
10.0' (3.1 m)	0.04 fc (0.4 lx)	8.1' (2.5 m)	11.2' (3.4 m)

Cree is a registered trademark of Cree Inc. MoistureBlock is a trademark of DSM&T Co. Inc.

© 2020 Hunter Industries™. Hunter, FX Luminaire, and all related logos are trademarks of Hunter Industries, registered in the U.S. and other countries.